

Fitting Instructions

for YewdaleKestrel[®] Mounting plates
(K08BW, K08CW)



Fitting Instructions

for YewdaleKestrel[®] Mounting plates
(K08BW, K08CW)

Part no: 992


yewdale.co.uk

Fitting Instructions


YewdaleKestrel® Mounting plates (K08BW, K08CW)

K08BW, K08CW Mounting plates:

K08BW

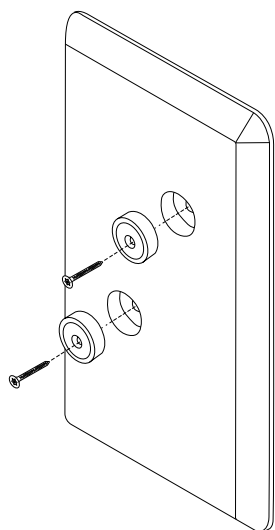

K08CW

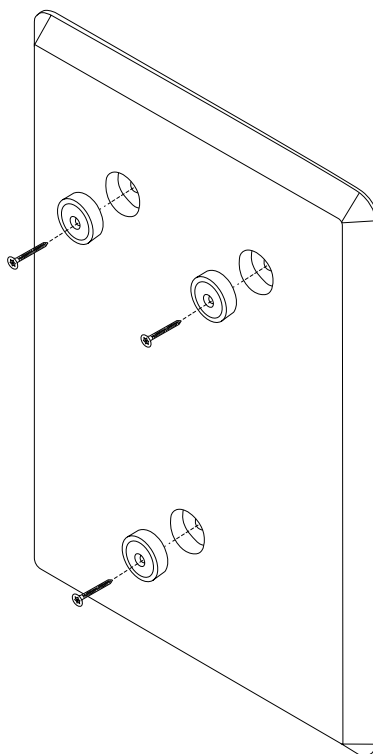

For more information on installations, using the systems safely, load testing and maintenance, please scan the QR code to read our YewdaleKestrel® Policy.



K08BW, K08CW Mounting plates:

1. Using the holes in the plate, mark all fixing points ensuring there will be no obstructions and the plate can be fixed adequately and flat to structure.
2. The plate is fixed to the wall using the security screws provided, which go through the hole in the magnets. Each magnet has a countersunk hole to allow the screw head to be flush once in place. Ensure all screws are in place adequately and the plate is flush and tight against the surface it is being fixed to. There must be no gaps between the plate and the wall.

Fitting Accessories to back plate

Using the template provided, mark the fixing locations on the rear of the accessories. Double-check to make sure there is no clash with any workings of the accessories inside. Drill a hole the correct size to receive the rivet provided. Once ready, secure the KD4S disc supplied with the rivet and the penny washer to the inside of the accessory. Please ensure the disc is fixed securely to the accessories and can't be removed.

Offer the accessories to the plate to ensure the magnet and the disc align. Once you have confirmed this, the installation is complete.

Should you require it, add anti-pick silicone to the edge of the plate. This is up to your discretion.

NB. Security screws can be used if preferred (Part numbers KT1, KT3)

All Brackets

Test the completed installation. The downward force needed to part the brackets should never be more than 400N (40kg static load) at any point.

Warning

The magnetic element of the YewdaleKestrel® bracket is POWERFUL. Handle with care. If attached to a flat steel surface, it may be difficult to remove the magnet. **DO NOT PLACE NEAR SENSITIVE ELECTRONIC EQUIPMENT.**

YewdaleKestrel® products are designed as standalone products only. Care should be taken when assessing or arranging a room to ensure that YewdaleKestrel® products cannot be misused in conjunction with any other item, furniture or fixings in the room.

It is the responsibility of the end user or client to ensure the product is suitable for the environment it is being installed in. YewdaleKestrel® products must be fitted by a qualified professional following the manufacturer's instructions. Failure to do so could jeopardise the product's effectiveness as an anti-ligature system. All installations must be checked and commissioned on completion to ensure the downward forces does not exceed the maximum nor that it is breaking away below the normal force. It is highly recommended that sign off proof that the product is installed and commissioned correctly is issued to the client after installation.



Head Office:

Enterprise Way,
Wickford, Essex, SS11 8DH

Call: +44 (0)1268 570900

Fax: +44 (0)1268 732509

Email: sales@yewdale.co.uk

London Office & Showroom:

4 Sutton Lane,
London, EC1M 5PU

Call: +44 (0)203 818 5905

For more information on all
Yewdale products, please call
the sales department.



yewdale **Defiant**[®]
FABRIC AND BLIND SYSTEMS



yewdale **Kestrel**[®]
MAGNETIC ANTI-LIGATURE SYSTEM



yewdale **Movatrack**[®]
CUBICLE AND TRACK SYSTEMS



yewdale **Harrier**[®]
CUBICLE AND SHOWER CURTAINS



yewdale **Vitesse**[®]
CURTAIN TRACK SYSTEMS